


UCS Series



Product feature

1. Plastic polyurethane material conforms to the ROHS environment protection requirement.
2. High elasticity: small bend radius enables PU tubing to pass through the tight space.
3. Anti-knot: better anti-knot effect than other plastic tubing.
4. Excellent flexibility: it can bear repeated expansion.
5. Anti-abrasion: long working life and suitable for the environment in which it is easy to be worn.
6. Low permeability of gas: relieve the problems of leakage and pollution.
7. Good anti-solubility: no solvent leaks, therefore it will not pollute the environment.
8. Low compression: maintain excellent physical character.
9. Wide resistance: it has certain resistance to chemicals, water, fuel, oil and bacterium.

Technical chart

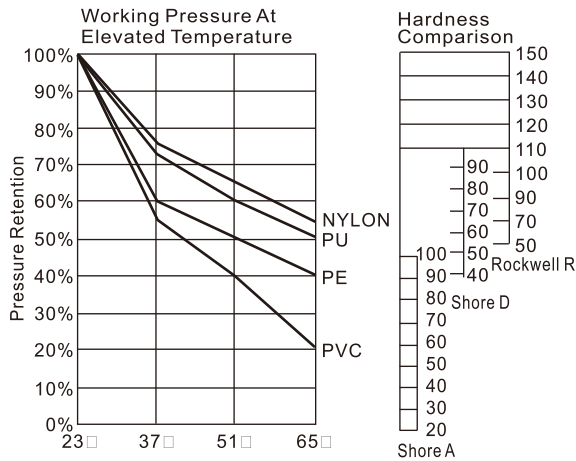

Specification (Standard pressure type)

Type [Note1]	Tubing OD(mm)	Tubing ID(mm)	Working Pressure at 23°C(MPa) [Note2]	Burst pressure at 23°C(MPa)	Bend radius(mm)	Length(m) [Note3]	Temp. (°C)
UCS060040□030□□	6.0	4.0	1.0	3.0	38	3	-20~70
UCS060040□060□□	6.0	4.0	1.0	3.0	38	6	
UCS060040□090□□	6.0	4.0	1.0	3.0	38	9	
UCS060040□120□□	6.0	4.0	1.0	3.0	38	12	
UCS060040□150□□	6.0	4.0	1.0	3.0	38	15	
UCS080050□060□□	8.0	5.0	1.0	3.0	38	6	
UCS080050□090□□	8.0	5.0	1.0	3.0	38	9	
UCS080050□120□□	8.0	5.0	1.0	3.0	38	12	
UCS080050□150□□	8.0	5.0	1.0	3.0	38	15	
UCS100065□060□□	10.0	6.5	1.0	3.0	50	6	
UCS100065□090□□	10.0	6.5	1.0	3.0	50	9	
UCS100065□120□□	10.0	6.5	1.0	3.0	50	12	
UCS100065□150□□	10.0	6.5	1.0	3.0	50	15	
UCS120080□060□□	12.0	8.0	1.0	3.0	60	6	
UCS120080□090□□	12.0	8.0	1.0	3.0	60	9	
UCS120080□120□□	12.0	8.0	1.0	3.0	60	12	
UCS120080□150□□	12.0	8.0	1.0	3.0	60	15	

Specification (Lower pressure type)

Type [Note1]	Tubing OD(mm)	Tubing ID(mm)	Working Pressure at 23°C(MPa) [Note2]	Burst pressure at 23°C(MPa)	Bend radius(mm)	Length(m) [Note3]	Temp. (°C)
UCS080055□060□□	8.0	5.5	0.8	2.0	38	6	-20~70
UCS080055□090□□	8.0	5.5	0.8	2.0	38	9	
UCS080055□120□□	8.0	5.5	0.8	2.0	38	12	
UCS080055□150□□	8.0	5.5	0.8	2.0	38	15	

[Note1] "□" in the type column is for "color", and "□□" is for "coupling type" and "coupling mode".

[Note2] Working pressure: 3 to 1 safety factor.

[Note3] Material length: length of operating status=(0.8~0.9)xMaterial length.

Ordering code

UCS 080 050 BU 090M A 1						
① Model	② Tubing OD	③ Tubing ID	④ Standard color [Note1]	⑤ Material length	⑥ Coupling type	⑦ Coupling form
UCS: Ester Base	060: Φ6.0mm 080: Φ8.0mm 100: Φ10.0mm 120: Φ12.0mm	040: Φ4.0mm 050: Φ5.0mm 055: Φ5.5mm 065: Φ6.5mm 080: Φ8.0mm	BU: Blue BK: Black GE: Orange C: Clear WH: White CB: Clear Blue R: Red Y: Yellow GN: Green BR: Brown CR: Clear Red CG: Clear Green CY: Clear Yellow CE: Clear Orange	030M: 3m 060M: 6m 090M: 9m 120M: 12m 150M: 15m	A: one end is 30cm and the other end is 10cm B: Both of the tubings of the couplings are 10cm C: Both of the tubings of the couplings are 0cm	1: Without coupling 2: With female-male coupling 3: With male-male coupling

[Note1] Lower pressure type has nine standard colors: Blue\ Black\ Orange\ Clear\ White\ Clear Blue\ Red\ Yellow\ Gray.

Pipe end coupling

Male quick coupling	Female quick coupling	Male quick coupling	Female quick coupling	Male quick coupling	Female quick coupling	Male quick coupling	Female quick coupling
PP40 Φ12 × Φ8	SP40 Φ12 × Φ8	PP30 Φ10 × Φ6.5	SP30 Φ10 × Φ6.5	PP20 Φ8 × Φ5	SP20 Φ8 × Φ5	PP10 Φ6 × Φ4	SP10 Φ6 × Φ4
PP40/SP40-PU tubing (12 × 8) quick coupling use		PP30/SP30-PU tubing (10 × 6.5) quick coupling use		PP20/SP20-PU tubing (8 × 5) quick coupling use		PP10/SP10-PU tubing (6 × 4) quick coupling use	